



***lecture 3:
reverse engineering & design
discovery***

csc302h

winter 2014



- a1 is up on the website
- see me if you are still not in a group
- stick around for tutorial

- minimize coupling between modules
- conway's law re. software structure & team/communication structure
- common architectures
 - Layered
 - open vs. closed, n-tier, partitioned
 - others: broker, client-server, event-based, repository (hub), mvc
- uml
 - package & component diagrams



Software **Re-Engineering**

- **Why software evolves continuously**
- **Costs of Software Evolution**
- **Challenges of Design Recovery**
- **What reverse engineering tools can and can't do**



The Altimeter Example

```
IF not-read1(V1) GOTO DEF1;
display (V1);
GOTO C;
DEF1: IF not-read2(V2) GOTO DEF2;
display(V2);
GOTO C;
DEF2: display(3000);
C:
```

```
if (read-meter1(V1))
    display(V1);
else {
    if (read-meter2(V2))
        display(V2);
    else
        display(3000);
}
```


Questions:

- Should you refactor this code?
- Should you fix the default value?


Source: Adapted from van Vliet 1999



Software Evolves Continuously

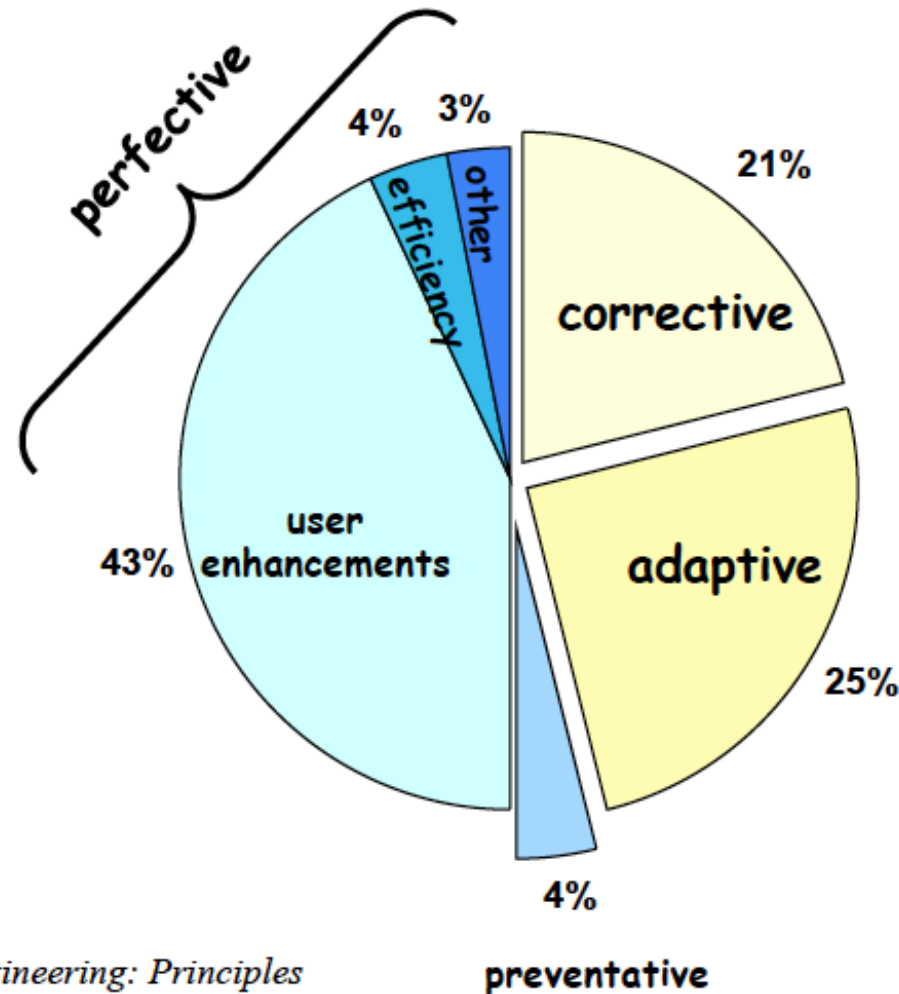

Data from:
van Vliet, H., *Software Engineering: Principles and Practices*, Wiley 1999, p449





Program Types

Source: Adapted from Lehman 1980, pp1061-1063

S-type Programs (“Specifiable”)

problem can be stated formally and completely

acceptance: Is the program correct according to its specification?

“evolution” not relevant

A new specification defines a new problem

P-type Programs (“Problem-solving”)

imprecise statement of a real-world problem

acceptance: Is the program an acceptable solution to the problem?

This software may evolve continuously

the solution is never perfect, and can be improved

the real-world changes and hence the problem changes

E-type Programs (“Embedded”)

software that becomes part of the world that it models




acceptance: depends entirely on opinion and judgment

This software is inherently evolutionary

changes in the software and the world affect each other



Source: Adapted from Lehman 1980, pp1061-1063

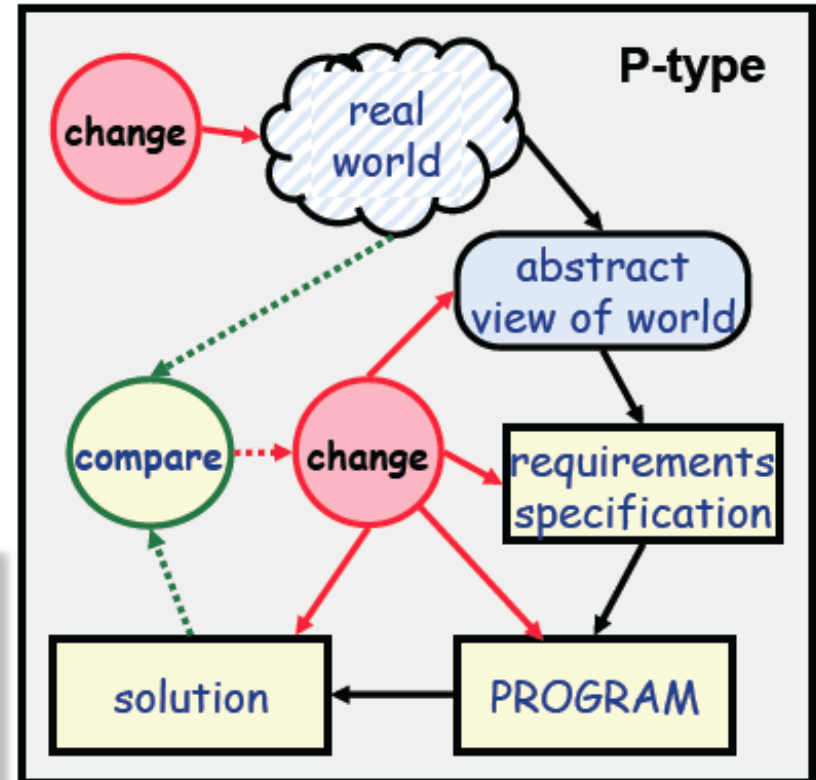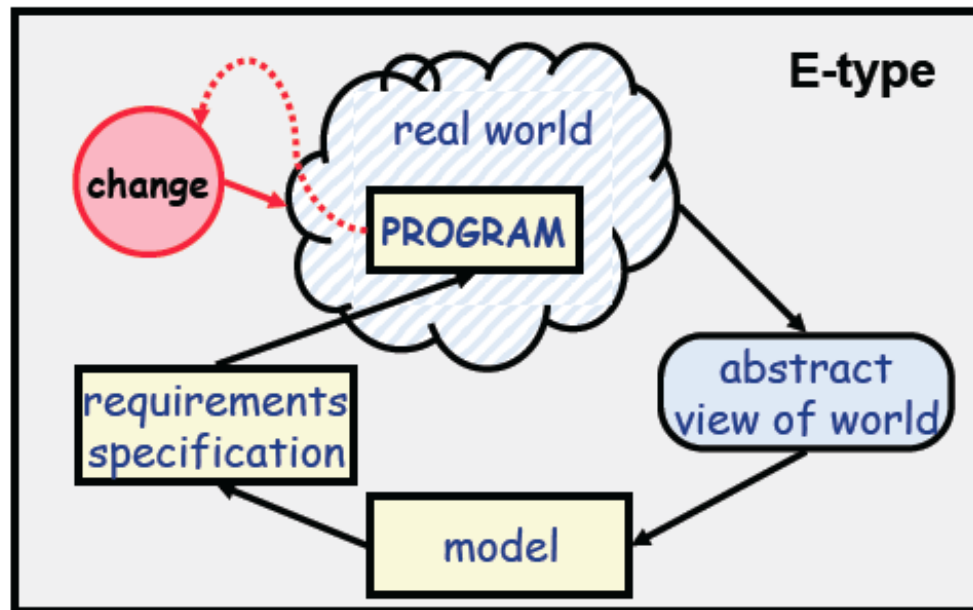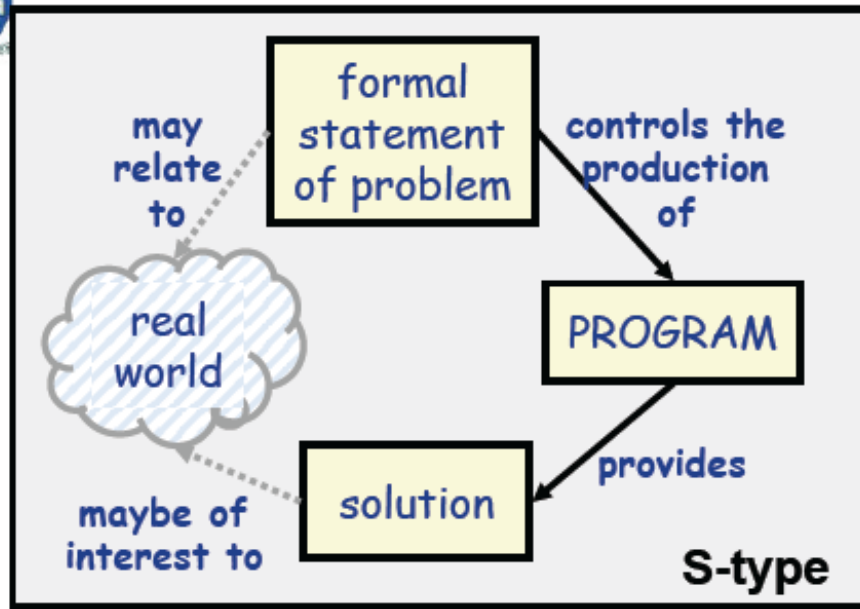



Laws of Program Evolution

Source: Adapted from Lehman 1980, pp1061-1063

Continuing Change

Any software that **reflects some external reality** undergoes continual change or becomes progressively less useful

change continues until it is judged more cost effective to replace the system

Increasing Complexity

As software evolves, its **complexity** increases...

...unless steps are taken to control it.

Fundamental Law of Program Evolution

Software evolution is self-regulating

...with statistically determinable trends and invariants

Conservation of Organizational Stability

During the active life of a software system, the work output of a development project is roughly constant (regardless of resources!)


Conservation of Familiarity

The amount of change in successive releases is roughly constant


No.	Brief Name	Law
I 1974	Continuing Change	<i>E</i> -type systems must be continually adapted else they become progressively less satisfactory.
II 1974	Increasing Complexity	As an <i>E</i> -type system evolves its complexity increases unless work is done to maintain or reduce it.
III 1974	Self Regulation	<i>E</i> -type system evolution process is self regulating with distribution of product and process measures close to normal.
IV 1980	Conservation of Organisational Stability (invariant work rate)	The average effective global activity rate in an evolving <i>E</i> -type system is invariant over product lifetime.
V 1980	Conservation of Familiarity	As an <i>E</i> -type system evolves all associated with it, developers, sales personnel, users, for example, must maintain mastery of its content and behaviour [leh80a] to achieve satisfactory evolution. Excessive growth diminishes that mastery. Hence the average incremental growth remains invariant as the system evolves.
VI 1980	Continuing Growth	The functional content of <i>E</i> -type systems must be continually increased to maintain user satisfaction over their lifetime.
VII 1996	Declining Quality	The quality of <i>E</i> -type systems will appear to be declining unless they are rigorously maintained and adapted to operational environment changes.
VIII 1996	Feedback System (first stated 1974, formalised as law 1996)	<i>E</i> -type evolution processes constitute multi-level, multi-loop, multi-agent feedback systems and must be treated as such to achieve significant improvement over any reasonable base.



User requirements always grow

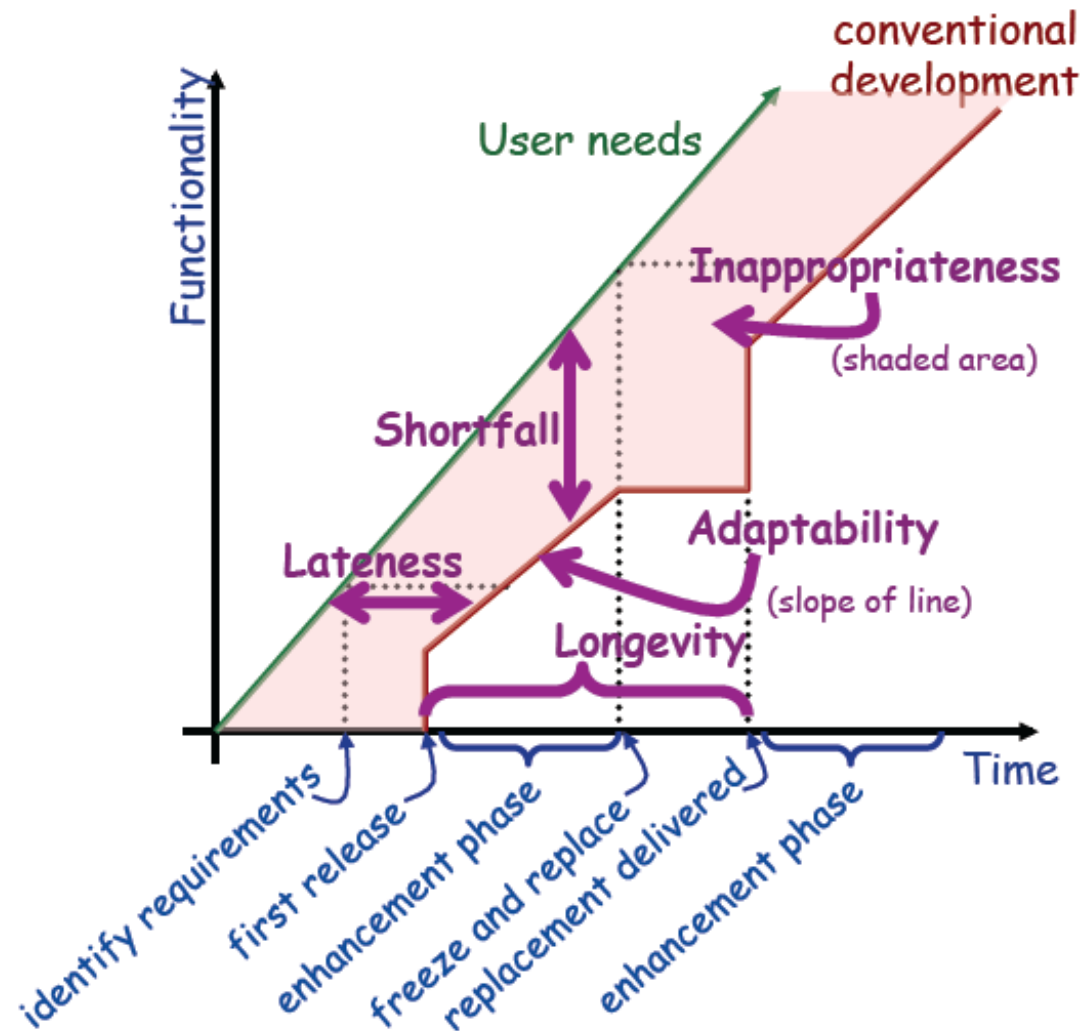

Source: Adapted from Davis 1988, pp1453-1455






E.g. Logica Financial Software

(Source: Lehman et al, 2000)


Size in Modules

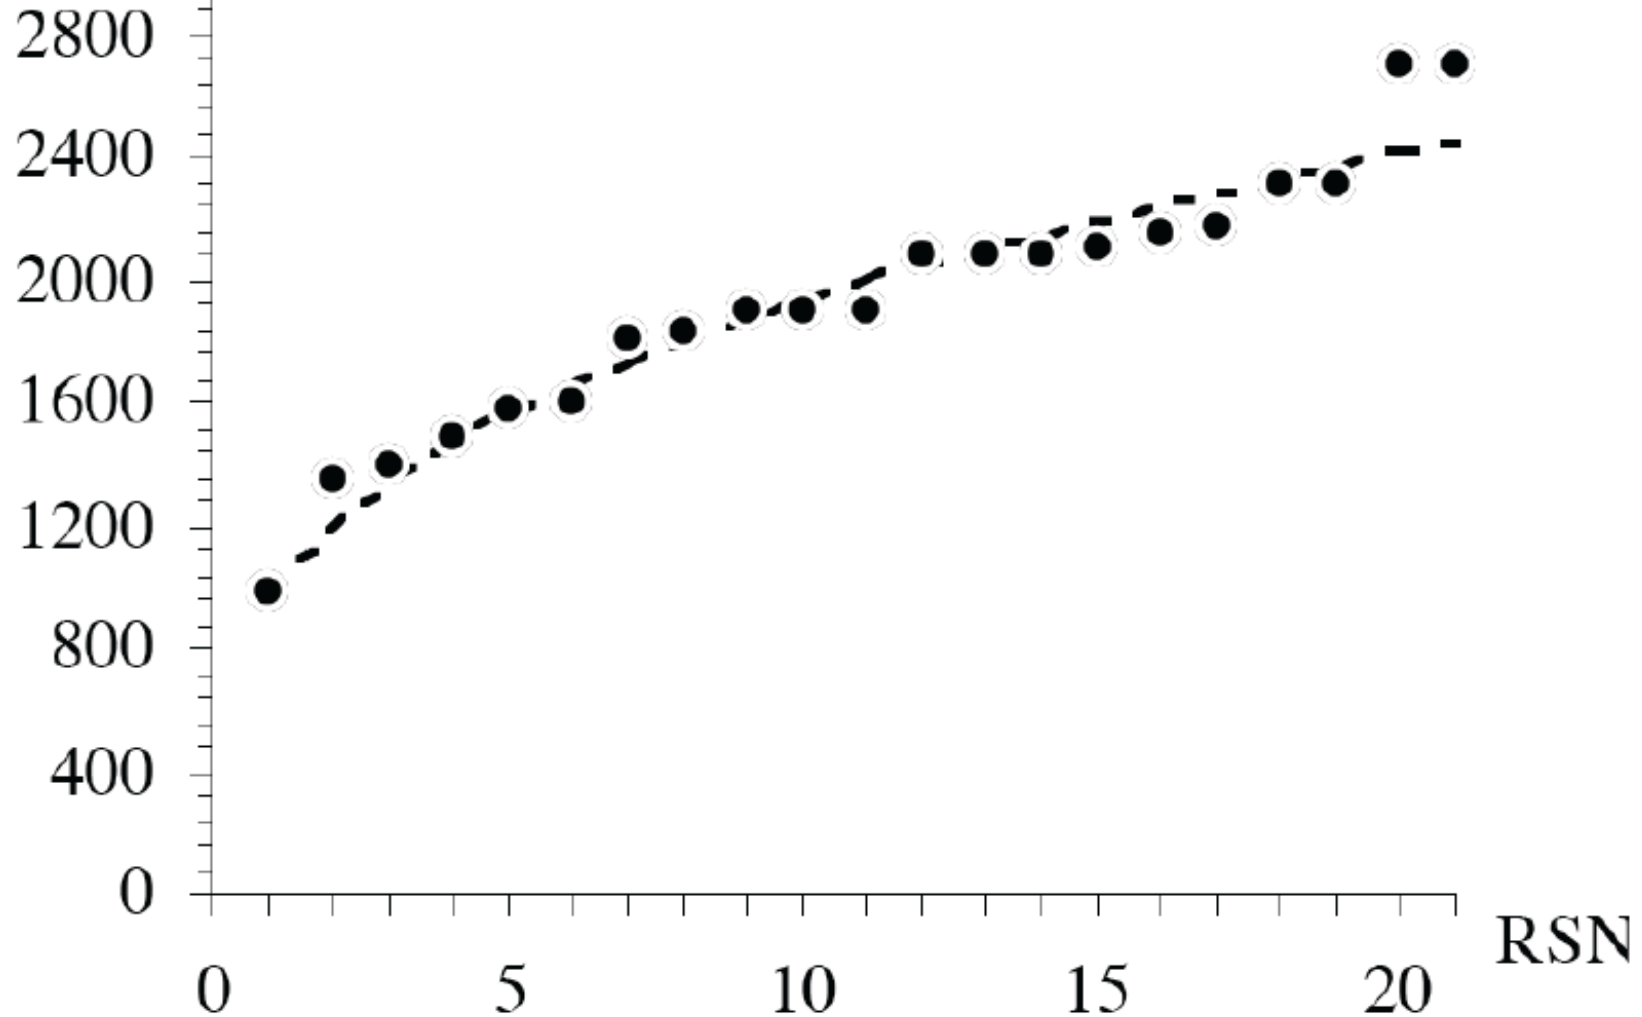




E.g. Linux Kernel

(Source: Godfrey & Tu, 2000)

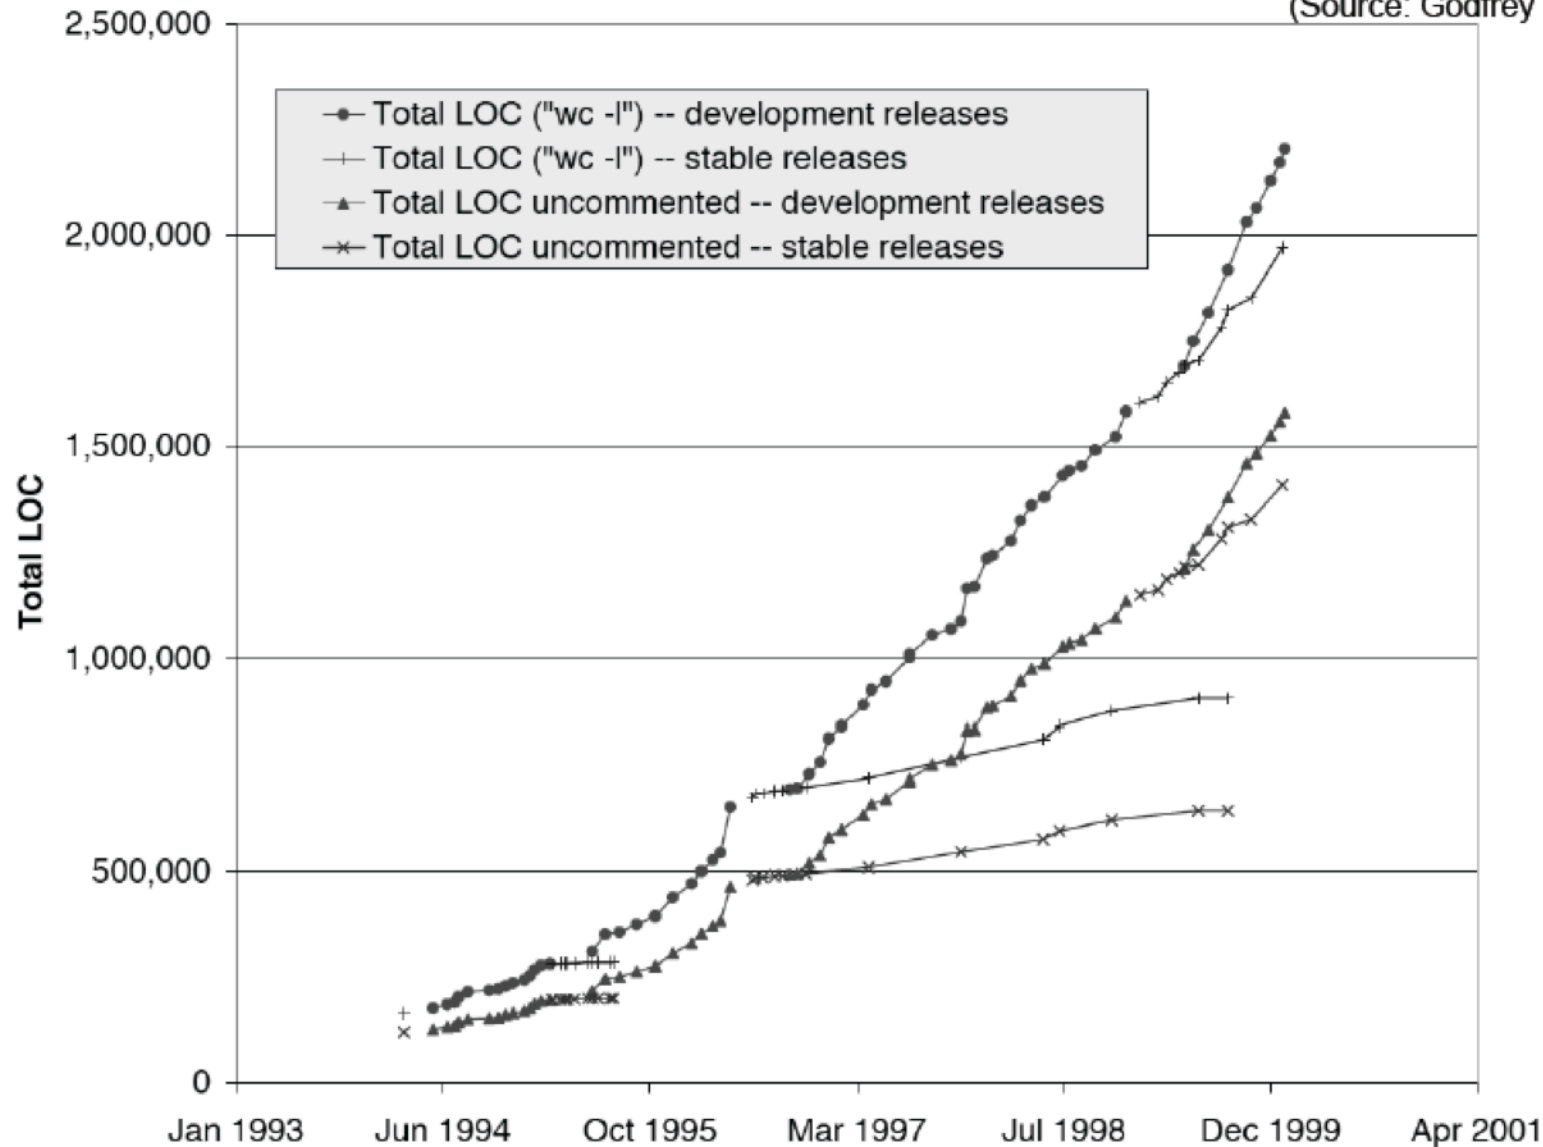




E.g. Hadley Centre Climate Model

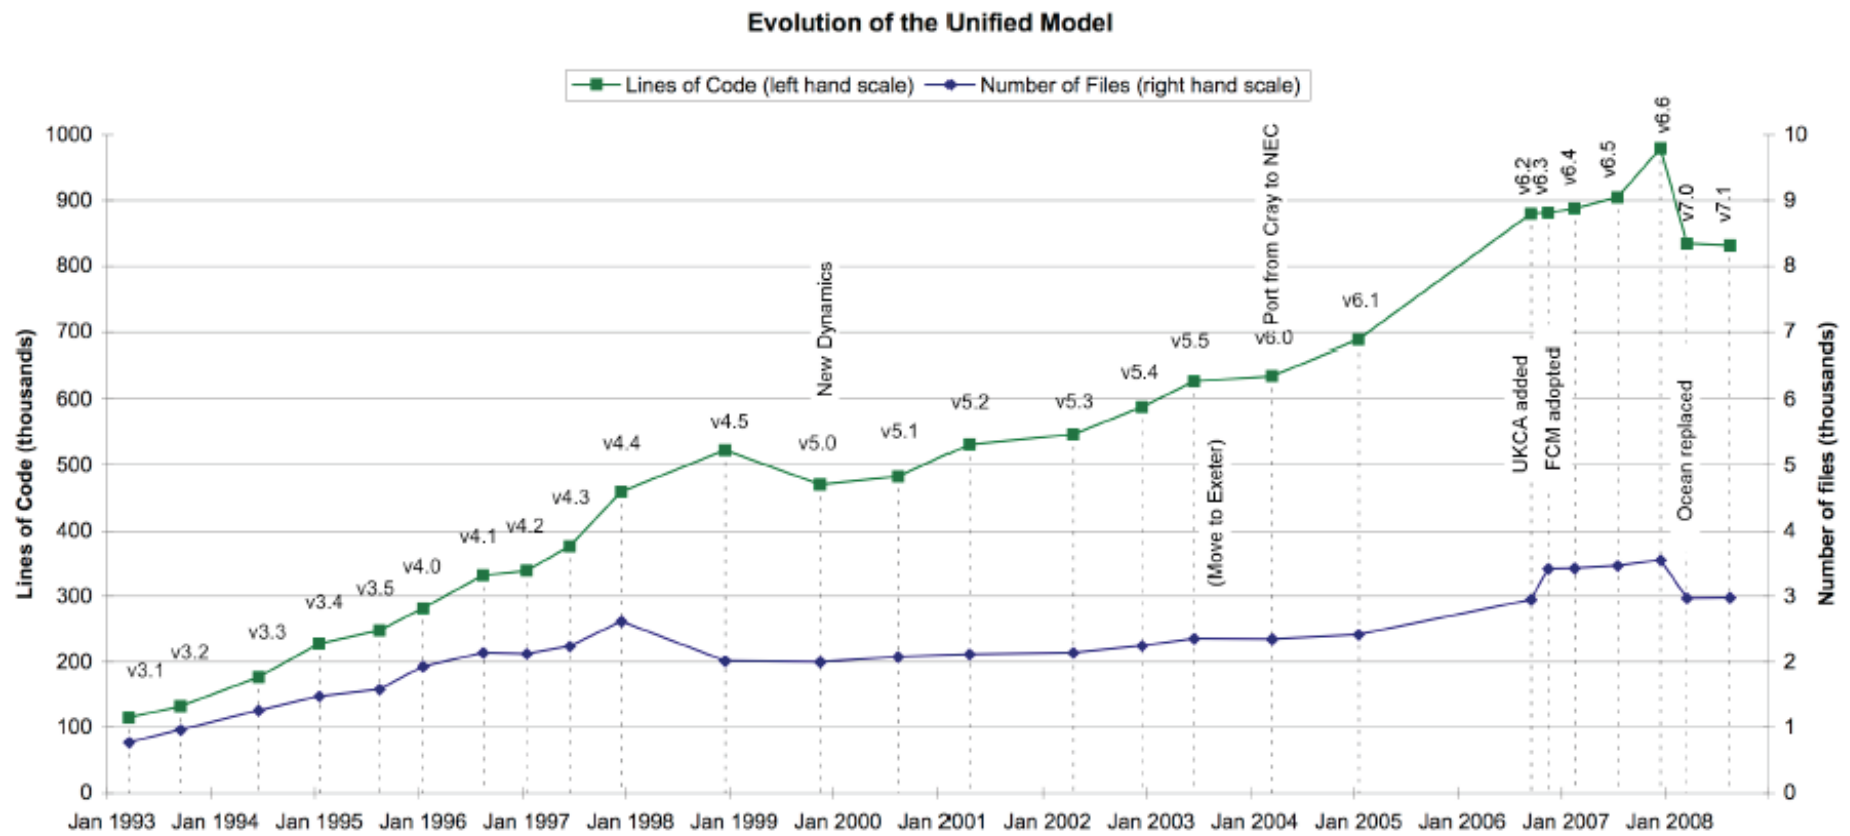

Lines of Code in Windows

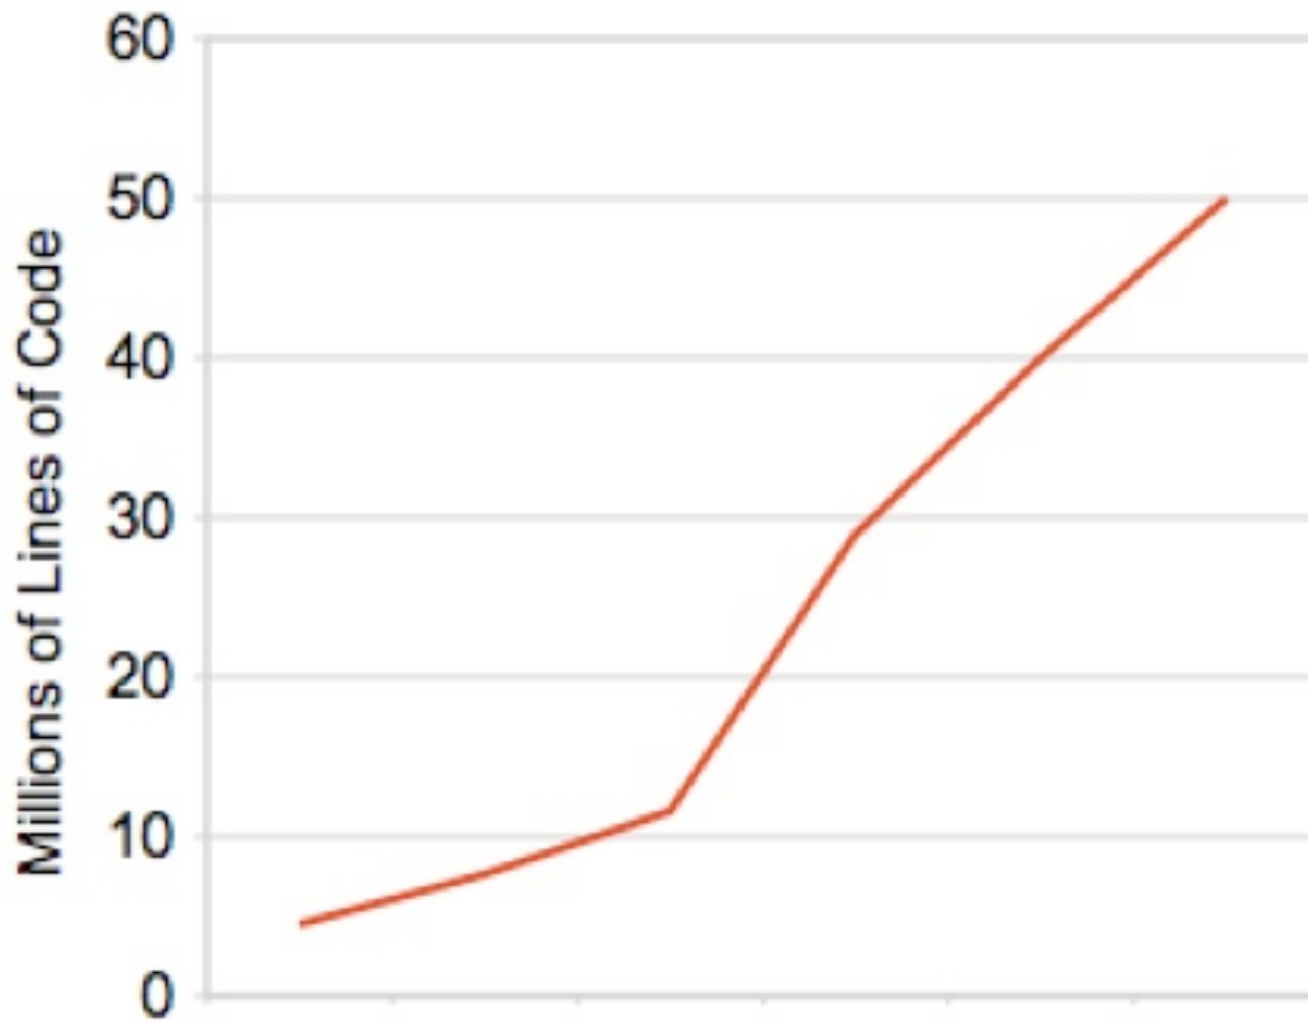

Years: 1993-2006



Software Geriatrics

Source: Adapted from Parnas, "Software Aging" 1996

Causes of Software Aging

Failure to update the software to meet changing needs

Customers switch to a new product if benefits outweigh switching costs

Changes to software tend to reduce coherence & increase complexity

Costs of Software Aging

Owners of aging software find it hard to keep up with the marketplace

Deterioration in space/time performance due to deteriorating structure

Aging software gets more buggy

Each "bug fix" introduces more errors than it fixes

Ways of Increasing Longevity

Design for change

Document the software carefully

Requirements and designs should be reviewed by those responsible for its maintenance

Software Rejuvenation...




Reducing Maintenance Costs

General

Modular structure
Comprehensibility
Good documentation

Higher quality code
Better testing (verification)
Use of standards

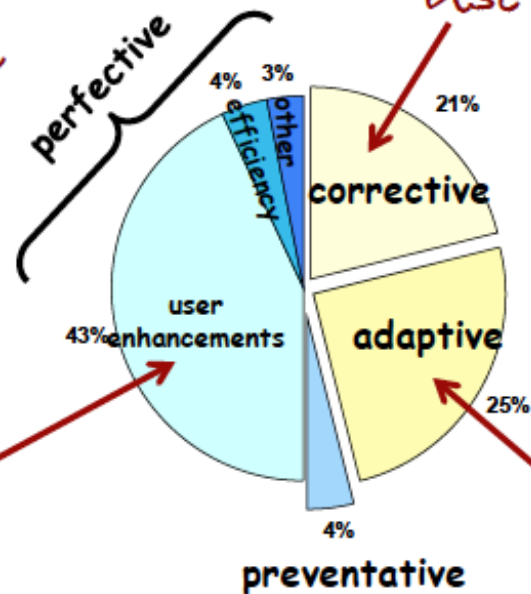

Better requirements analysis
prototyping, iterative development
Design for change

Platform independence
Design for change
Good architecture



Why maintenance is hard

Poor code quality

- opaque code
- poorly structured code
- dead code

Lack of knowledge of the application domain


- understanding the implications of change

Lack of documentation

- code is often the only resource
- missing rationale for design decisions

Lack of glamour

Source: Adapted from van Vliet 1999





Rejuvenation

Reverse Engineering

Re-documentation (same level of abstraction)

Design Recovery (higher levels of abstraction)

Restructuring

Refactoring (no changes to functionality)

Revamping (only the user interface is changed)

Re-Engineering

Real changes made to the code

Usually done as round trip:

design recovery -> design improvement -> re-implementation

Source: Adapted from van Vliet 1999



Program Comprehension

During maintenance:

programmers study the code about 1.5 times as long as the documentation
programmers spend as much time reading code as editing it

Experts have many knowledge chunks:

programming plans
beacons
design patterns

Experts follow dependency links

...while novices read sequentially

Much knowledge comes from outside the code

Source: Adapted from van Vliet 1999



Example 1

What does this do?

```
for (i=0; i<n; i++) {  
  for (j=0; j<n; j++) {  
    if (A[i,j]) {  
      for (k=0; k<n; k++) {  
        if (A[j,k])  
          A[i,k]=true;  
      }  
    }  
  }  
}
```

Source: Adapted from van Vliet 1999




Example 2

```
procedure A(var x: w);  
begin  
    b(y, n1);  
    b(x, n2);  
    m(w[x]);  
    y := x;  
    r(p[x]);  
end;
```

```
procedure change_window(var nw: window);  
begin  
    border(current_window, no_highlight);  
    border(nw, highlight);  
    move_cursor(w[nw]);  
    current_window := nw;  
    resume(process[nw]);  
end;
```

Source: Adapted from van Vliet 1999





What tools can do

Reformatters / documentation generators

Make the code more readable

Add comments automatically

Improve Code Browsing

E.g visualize and traverse a dependency graph

(simple) Code transformation

E.g. Refactoring class browsers

E.g. Clone detectors

(simple) Design Recovery

E.g. build a basic class diagram

E.g. use program traces to build sequence diagrams




*"what were they thinking
when they wrote this?!?!"*



what tools can't do (2)

Jon Bentley found at Bell Labs that most (good) programmers can't even get binary search right! He published this in his book *Programming Pearls*.

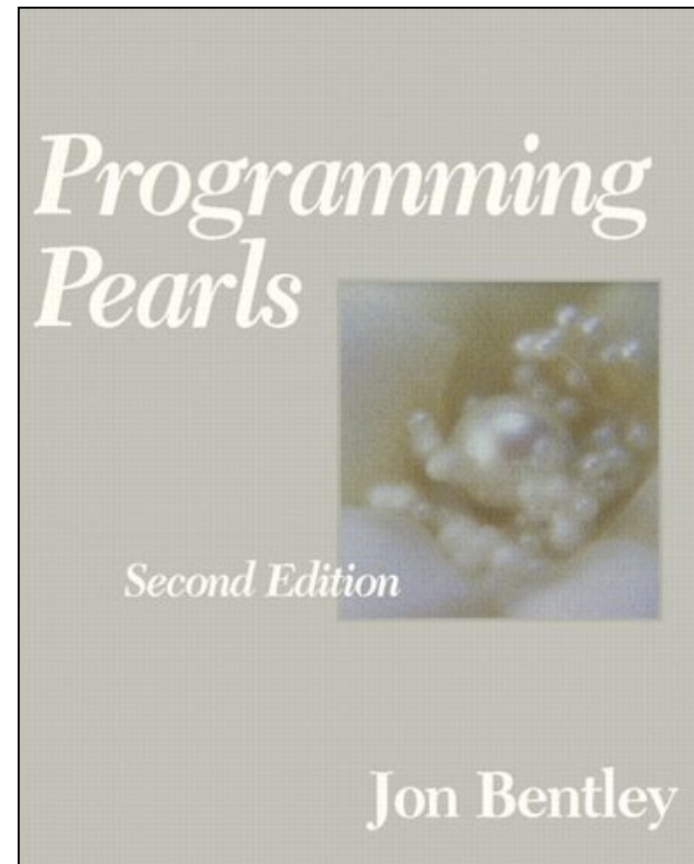



what tools can't do (3)

```
int matt_search(int x[], int t, int lo, int hi) {
    int mid = lo+(hi-lo)/2;

    if (x[lo] == t) return lo;
    if (x[mid] == t) return mid;
    if (x[hi] == t) return hi;

    if (mid == lo) return -1;

    if (t < x[mid])
        return matt_search(x, t, lo, mid);
    else
        return matt_binary_search(x, t, mid, hi);
}
```

gimme a break! I only gave myself 10 minutes




what tools can't do (4)

```
int bloch_search(int x[], int t, int count) {
    int lo = 0, hi = count-1, mid, val;

    while (lo <= hi) {
        mid = lo+(hi-lo)/2;
        val = x[mid];

        if (val < t) lo = mid+1;
        else if (val > t) hi = mid-1;
        else return mid;
    }

    return -(lo+1);
}
```

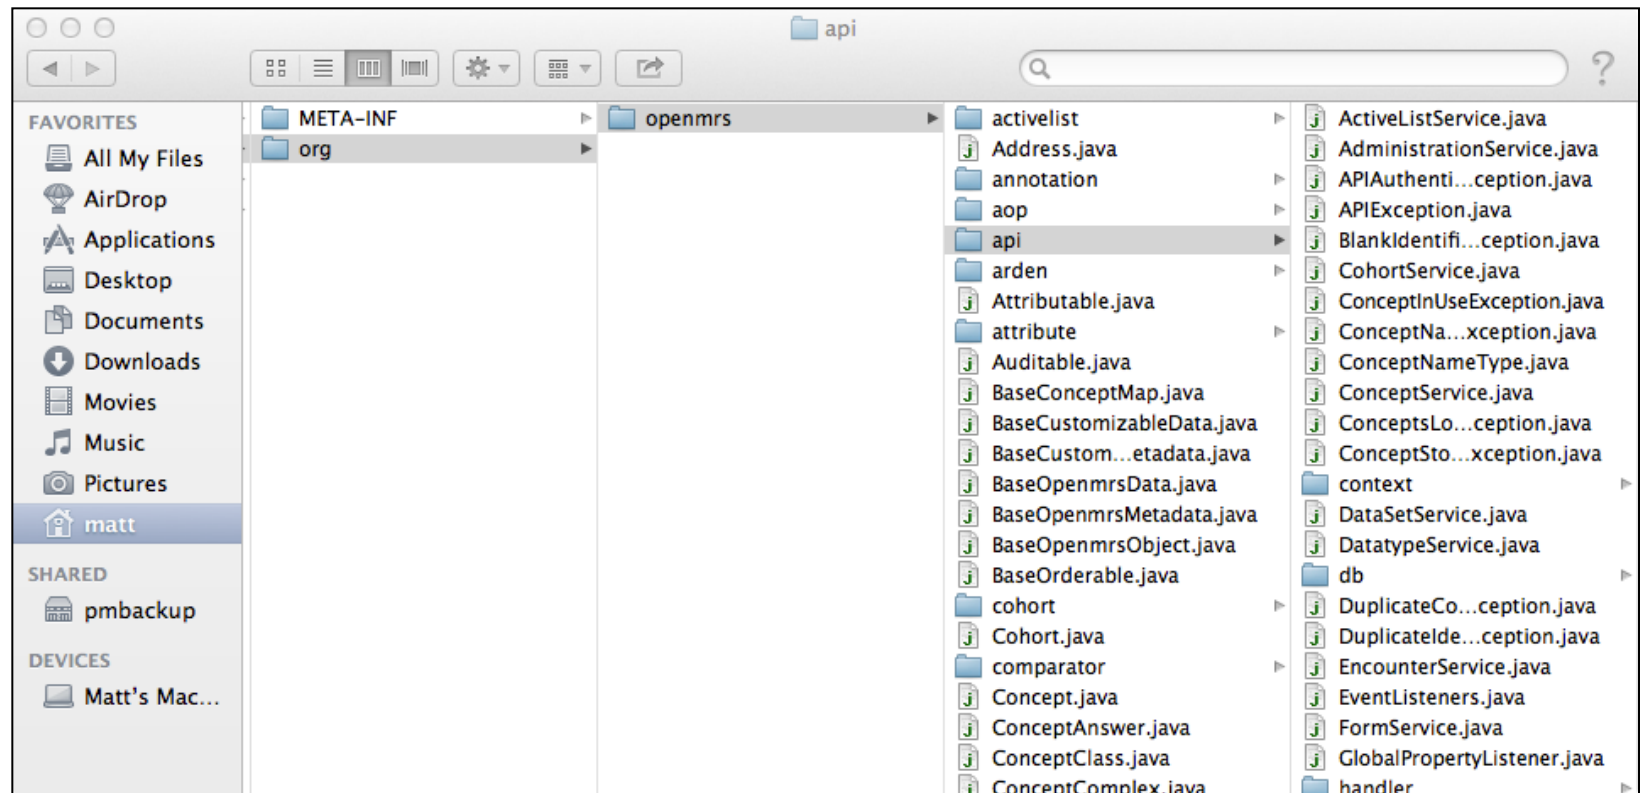

design discovery tools (2)



The screenshot shows the Eclipse IDE interface with the following components:

- Package Explorer:** Shows a project structure under 'org' with sub-packages: 'activelist', 'annotation', 'aop', and 'api'. The 'api' package contains numerous Java files, including 'ConceptService.java'.
- Editor:** Displays the source code for 'ConceptService.java'. The code includes a package declaration, imports, and a public interface definition:


```

      package org.openmrs.api;

      import org.openmrs.api.context.Context;
      import org.openmrs.api.context.OpenmrsService;
      import org.openmrs.api.impl.ActiveListService;
      import org.openmrs.api.impl.AdministrationService;
      import org.openmrs.api.impl.APIAuthenticationException;
      import org.openmrs.api.impl.APIException;
      import org.openmrs.api.impl.BlankIdentifierException;
      import org.openmrs.api.impl.CohortService;
      import org.openmrs.api.impl.ConceptInUseException;
      import org.openmrs.api.impl.ConceptNameInUseException;
      import org.openmrs.api.impl.ConceptNameType;
      import org.openmrs.api.impl.ConceptService;
      import org.openmrs.api.impl.ConceptsLockedException;
      import org.openmrs.api.impl.ConceptStopWordException;
      import org.openmrs.api.impl.DataSetService;
      import org.openmrs.api.impl.DatatypeService;
      import org.openmrs.api.impl.DuplicateConceptNameException;
      import org.openmrs.api.impl.DuplicateIdentifierException;
      import org.openmrs.api.impl.EncounterService;
      import org.openmrs.api.impl.EventListeners;
      import org.openmrs.api.impl.FormService;
      import org.openmrs.api.impl.GlobalPropertyListener;
      import org.openmrs.api.impl.IdentifierNotUniqueException;
      import org.openmrs.api.impl.InsufficientIdentifiersException;


      /**
       * Sets the data access object for Concepts. The dao is used for saving and
       * to/from the database
       *
       * @param dao The data access object to use
       */
      public void setConceptDAO(ConceptDAO dao);

      /**
       * @deprecated use #saveConcept(Concept)
       */
      @Deprecated
      @Authorized( { PrivilegeConstants.MANAGE_CONCEPTS })
      public void createConcept(Concept concept) throws APIException;

      /**
       * concept.setConceptClass(context.getConceptService().getConceptClass(3));
       * concept.setDatatype(Context.getConceptService().getConceptDatatype(17));
       * concept.setName...
       * ... // and other required values on the concept
       * Context.getConceptService().saveConcept(concept);
       */
      </pre>

```
- Outline:** Lists the methods of the 'ConceptService' interface, such as 'setConceptDAO', 'createConcept', 'updateConcept', 'getConceptByUuid', 'updateConcept', 'createDrug', 'updateDrug', 'deleteConcept', 'voidConcept', 'saveConcept', 'saveDrug', 'purgeConcept', 'retireConcept', 'retireDrug', 'unretireDrug', 'purgeDrug', 'getConcept', 'getConceptName', and 'getConceptAnswer'.
- Problems:** Shows '0 items' in the Problems view.

design discovery tools (3)

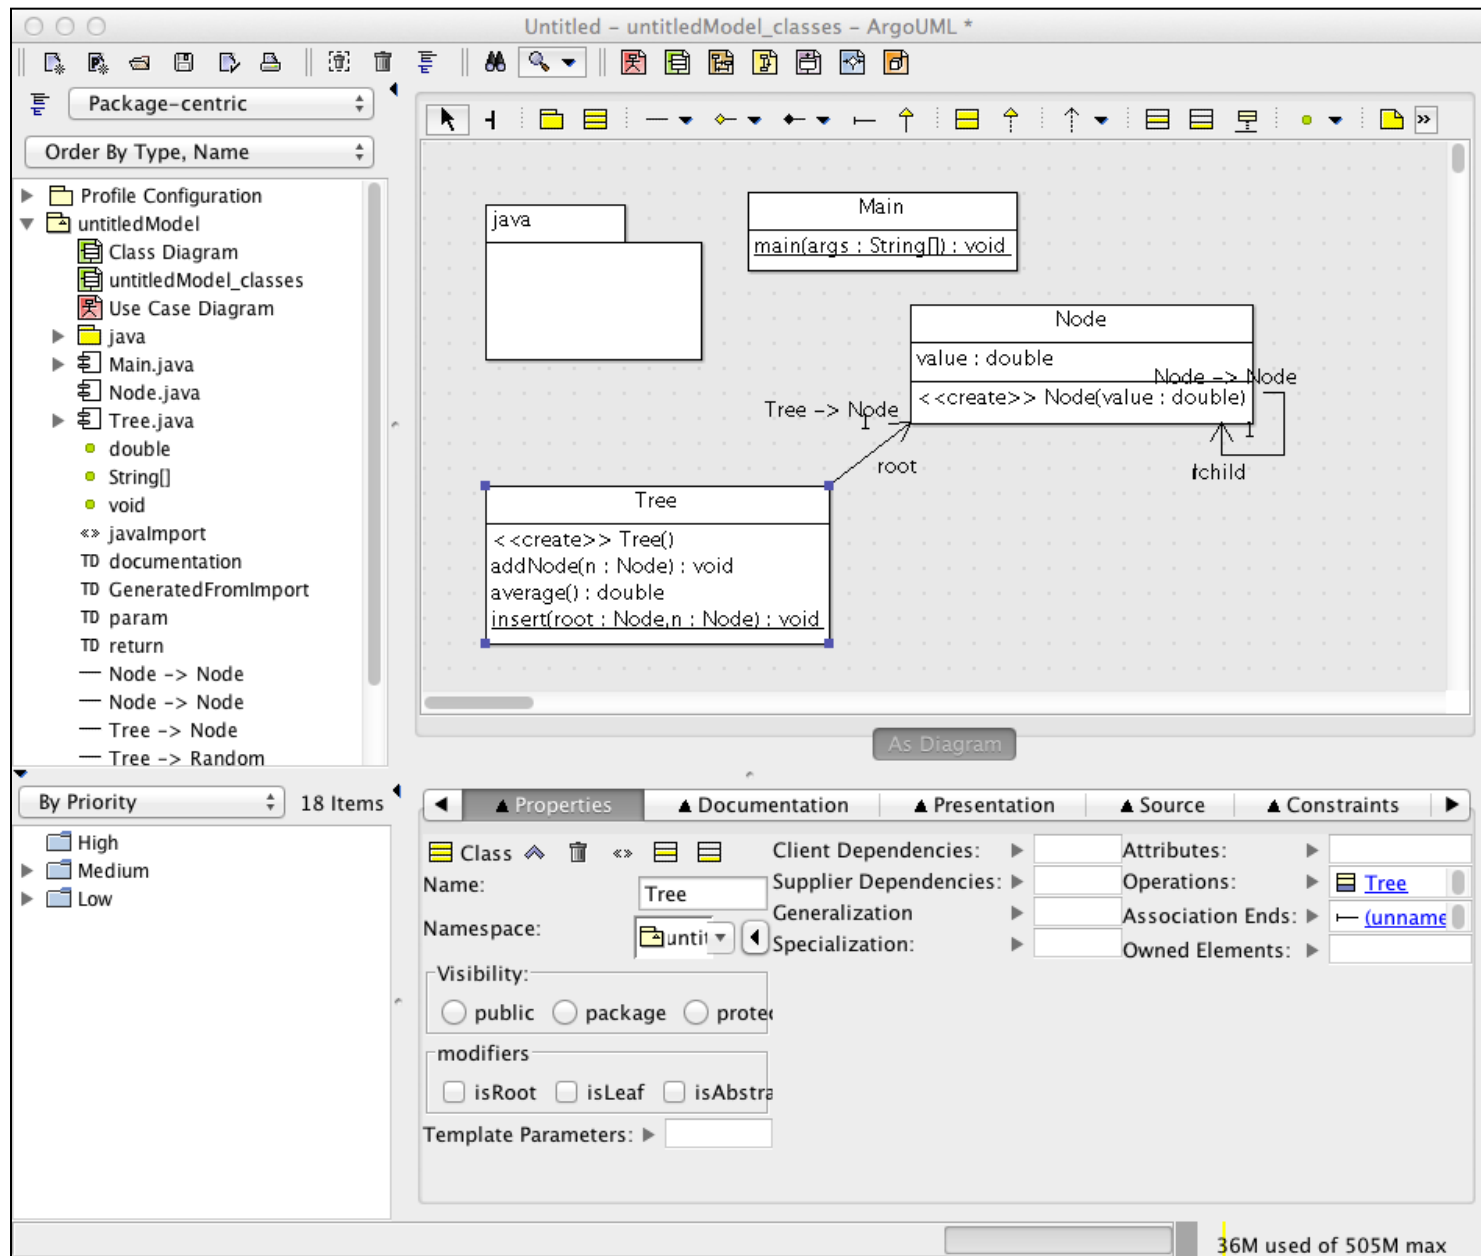

The screenshot displays the ArgoUML interface for a Java class model. The main workspace shows a class diagram with the following elements:

- Main Class:** Contains a `main(args : String[]) : void` method.
- Node Class:** Contains a `value : double` attribute and a `<<create>> Node(value : double)` method. It has a self-referencing association named `tchild` and a directed association to another `Node` class.
- Tree Class:** Contains `<<create>> Tree()` and `addNode(n : Node) : void` methods. It has a directed association to `Node` named `root` and a directed association to `Node` named `tchild`.

The interface also features a package browser on the left showing a project structure with packages like `java` and `untitledModel_classes`. The bottom panel shows the **Properties** view for the selected `Tree` class, including fields for Name, Namespace, Visibility, and Modifiers.



tutorial